



**Hadron**  
*Alamanda K-9 College & Phoenix P-12 Community College, VIC*  
*2023 F1® in Schools World Finals*  
*- 19th Place Overall*

# 2024 Technical Regulations Cadet Class Version 1.0

Proudly Supported by



**Australian Government**  
Department of Defence

Managed by



Re-Engineering Australia  
**Foundation**



Alamanda K-9 College & Phoenix P-12 Community College, VIC – 2023 F1 in Schools World Finals - Singapore  
(L to R: Dulain Withanage, Aston Brownbill, Hayden Gregg, Shaeshan Senthilnath, William Kynoch & Sahitya Chavali)

### ENQUIRIES

Re-Engineering Australia Foundation Ltd.  
PO Box 136  
Castle Hill NSW 1765  
P: 02 9620 9944  
F: 02 8079 0622  
E: [contact@rea.org.au](mailto:contact@rea.org.au)  
W: [www.rea.org.au](http://www.rea.org.au)

### COPYRIGHT NOTICE

This document, all its contents (including images, text, procedures) are copyright 2024, Re-Engineering Australia Foundation Ltd. All rights reserved.

Re-Engineering Australia Foundation Ltd. PO Box 136 Castle Hill NSW 1765 Australia.

Phone: 02 9620 9944. Email: [contact@rea.org.au](mailto:contact@rea.org.au)

REA, Re-Engineering Australia, the Re-Engineering Australia Foundation Logo, and other associated logos are trademarks of Re-Engineering Australia Foundation Ltd. All rights reserved

**F1® in Schools:** F1® in Schools, F1iS, Formula 1 in Schools, the F1® in Schools challenge, and the associated logos are trademarks of F1® in Schools.

**Formula 1®:** F1, Formula 1 and the associated logos are trademarks of Formula 1® Licensing BV.

### ACKNOWLEDGEMENT

In preparing the F1® in Schools Australian Technical Rules, certain wording and images have been adopted from the World Final Technical Regulations.

### REPRODUCTION

This document may only be reproduced by schools registered in the F1® in Schools program in Australia regardless of whether they intend to enter teams into the competition. To register your school in the F1® in Schools program at no cost, [click here](#). Schools outside of Australia must first seek permission from Re-Engineering Australia Foundation Ltd. prior to reproducing this document.

### ALTERATIONS

Re-Engineering Australia Foundation Ltd. reserves the right to alter any specifications and documentation associated with the 'Challenge' without prior notice.

Proudly Supported by



**Australian Government**

**Department of Defence**

## TABLE OF CONTENTS

<b>PREFACE</b> .....	<b>5</b>
Summary of Main Revisions from Review of 2023/2024 Season .....	5
<b>ARTICLE T1 - DEFINITIONS</b> .....	<b>6</b>
T1.1 Australian Competition Season.....	6
T1.3 Language Used.....	6
T1.4 Penalties .....	6
T1.5 Competition Classes .....	6
T1.6 F1® in Schools Car .....	7
T1.7 Vertical Reference Plane .....	7
T1.8 Fully Assembled Car .....	8
T1.9 Body .....	8
T1.10 Side Pod .....	8
T1.11 CO2 Cylinder Chamber.....	8
T1.12 Wing.....	8
T1.14 Span.....	8
T1.15 Chord .....	8
T1.16 Thickness.....	8
T1.17 Nosecone .....	8
T1.18 Wheel.....	9
T1.19 Wheel Support System .....	9
T1.22 Tether Line Guide.....	9
T1.23 Surface Finish & Decals.....	9
T1.24 Hand Finishing .....	9
T1.25 REA Official Balsa Wood Block.....	9
T1.26 Engineering Drawings .....	10
T1.27 Launch Energy Recovery System (LERS).....	10
T1.28 Ballast Screws .....	10
<b>ARTICLE T2 - GENERAL PRINCIPLES</b> .....	<b>10</b>
T2.1 Regulations Documents.....	10
T2.2 Interpretation of the Regulations.....	10
T2.3 Amendments to the Regulations .....	10
T2.4 Safe Construction .....	10
T2.5 Compliance with Critical Regulations.....	11
T2.6 Rectification of Critical Regulation Infringements .....	11
T2.7 Measurements .....	11
<b>ARTICLE T3 - GENERAL CAR REGULATIONS</b> .....	<b>12</b>
T3.1 Design, Manufacture & Construction .....	12
T3.2 Leading Features Minimum Width .....	12
T3.3 Finishing & Assembly .....	12
T3.4 Car Decals .....	13
T3.5 Undefined Features .....	13
T3.6 Overall Length.....	14
T3.7 Minimum Mass.....	14
T3.8 Track Clearance.....	14
T3.9 Balsa Wood Components .....	14
T3.10 Status During Racing .....	14

<b>ARTICLE T5 - BODY &amp; SIDE POD REGULATIONS .....</b>	<b>15</b>
T5.1	Body Construction.....15
T5.2	Implants, Foreign Objects or Voids .....15
T5.3	Width of Side Pod .....15
T5.4	Side Pod Projected Surface .....15
T5.5	Virtual Cargo .....15
T5.6	Virtual Cargo Identification .....16
<b>ARTICLE T7 - WING REGULATIONS .....</b>	<b>16</b>
T7.1	Wings .....16
T7.2	Wing Identification.....16
T7.3	Clear Airspace.....16
T7.4	Front Wing Positioning .....17
T7.6	Front Wing Construction Material .....17
T7.8	Span.....17
T7.9	Span Segments .....17
T7.10	Front & Rear Wing Chord .....18
T7.11	Front & Rear Wing Thickness .....18
T7.12	Rear Wing Positioning .....18
T7.13	Rear Wing Height.....19
T7.14	Rear Wing Construction Material .....19
<b>ARTICLE T8 - WHEEL REGULATIONS.....</b>	<b>19</b>
T8.1	Number and location .....19
T8.2	REA Standard Wheels .....19
T8.5	Full Contact Width.....19
T8.7	Freely Rotating Wheels.....19
T8.8	Visibility in Front View .....19
T8.9	Visibility from Top, Bottom & Side .....20
<b>ARTICLE T9 - WHEEL SUPPORT REGULATIONS .....</b>	<b>21</b>
T9.3	REA Standard Grommets .....21
T9.4	REA Standard Axles.....21
T9.5	Modifications .....21
<b>ARTICLE T10 - TETHER LINE GUIDE REGULATIONS.....</b>	<b>21</b>
T10.1	Location .....21
T10.2	Separation.....21
T10.3	Inside Diameter.....21
T10.4	Safety .....21
<b>ARTICLE T11 - POWER PLANT PROVISIONS.....</b>	<b>22</b>
T11.1	Interfacing with Launch Pod.....22
T11.2	Diameter .....22
T11.3	Depth .....22
T11.4	Distance from Track Surface.....22
T11.5	Chamber Wall Thickness .....22
T11.6	Finishing of Chamber Surrounds .....22
<b>ARTICLE T12 - APPENDICES .....</b>	<b>23</b>
T12.1	Official REA Balsa Block Dimensions .....23
T12.2	REA Standard Tether Guide Insertion Instructions.....24
T12.3	Official REA Standard Wheel Kit.....25
T12.4	Example Orthogonal Drawing .....26
T12.5	Wing Span Diagram.....27

## PREFACE

This document only contains 'Technical Regulations'. A separate document encompasses the 'Competition Regulations'.

These regulations will be valid for all 2024 State Finals and the 2025 National Final.

Car diagrams and images used in this document are an illustrative representation only and do not necessarily constitute a 'legal' design.

### Summary of Main Revisions from Review of 2023/2024 Season

The following summary provides an overview of all technical related regulations that have been revised from the 2023/2024 season's regulations.

It is each team's responsibility to thoroughly read this document in order to identify wording changes and to understand any impact this may have on their project.

All changes between this season and last season are identified within the document by using red underlined text.

### ARTICLE T1 - DEFINITIONS

Nil changes

### ARTICLE T2 - GENERAL PRINCIPLES

Nil changes

### ARTICLE T3 - GENERAL CAR REGULATIONS

Nil changes

### ARTICLE T5 - BODY & SIDE POD REGULATIONS

Nil changes

### ARTICLE T7 - WING REGULATIONS

Nil changes

### ARTICLE T8 - WHEEL REGULATIONS

Nil changes

### ARTICLE T9 - WHEEL SUPPORT REGULATIONS

Nil changes

### ARTICLE T10 - TETHER LINE GUIDE REGULATIONS

Removal of T10.5 Cadet Class restrictions. Teams may use any tether guide that fits the regulations.

### ARTICLE T11 - POWER PLANT PROVISIONS

Nil changes

## ARTICLE T1 - DEFINITIONS

### T1.1 Australian Competition Season

The standard sequence of Australian competitions runs across two calendar years. The State Finals held Sept/Oct/Nov in one year will feed to the National Final in February/March/April of the following year. There is no pathway for Cadet Class teams to the National Final.

### T1.3 Language Used

The language of the regulations is tiered. Those clauses expressed as “**MUST**” or “**WILL**” are mandatory and failure to comply will attract objective penalties - points and/or racing and/or in the extreme, disqualification. Those expressed as “**SHOULD**” or “**MAY**” reflect some level of discretion and choice.

Some clauses will be satisfied through team registration processes or declarations signed as complied with as part of the Challenge Terms and Conditions, whilst others will be tested through a variety of objective and subjective judging.

### T1.4 Penalties

A range of penalties will be applied for non-compliance with identified regulations. These penalties include:

#### T1.4.1 Point Penalty

Invoked from non-compliance with technical regulations and some competition regulations governing portfolio or trade booth restrictions. These are identified as **[Point Penalty]**.



#### T1.4.2 Time Penalty

Invoked from non-compliance with Technical Regulations which are identified as critical through the use of the danger symbol at left and listed in ARTICLE T2.5. These will be identified as **[Time Penalty]** and will be applied as 0.02, 0.05 or 0.10 second to every run/lap for every critical regulation violated up to a maximum of 0.5 seconds.

#### T1.4.3 Eligibility

Teams need to meet certain safety criteria. Failure to comply with certain criteria **MAY** lead to disqualification from racing. **[Eligibility]**.

### T1.5 Competition Classes

There are **four** competition classes in the Australian F1 in Schools competition: **3DP**, Cadet, Development and Professional.

**This document is only relevant for the Cadet Class ONLY.**

**Please note: Due to the Cadet Class regulations being separated from other competition classes and to maintain regulation numbering consistency, some regulations will not appear as sequential. These ‘missing’ numbers will be present in other competition class regulations.**

For more information please refer to the current Australian Competition Regulations **which can be downloaded from the Learning Space on the REA website.**

## T1.6 F1® in Schools Car

The Car A, also referred to as ‘the car’, and **MUST** be designed and manufactured according to these regulations for the purpose of participating in races on the F1 in Schools track at a State or National Final event, powered only by a single gas cylinder containing 8 grams of pressurised CO2. F1 in Schools cars are designed to travel the 20 metre race distance as quickly as possible, whilst withstanding the forces of launch acceleration, track traversing and physical deceleration after crossing the finishing line.

Each F1 in Schools car assembly **MUST** only consist of the following **mandatory** components and/or features:


1. A body
2. Side pods
3. CO2 cylinder chamber
4. Front wing
5. Rear wing
7. Wheels
8. Wheel support systems
10. Tether line guides
11. Decals

Each F1 in Schools car assembly **MAY** include the following optional components and/or features:

12. Surface finishing
13. Ballast screws


Adhesives are permissible for joining components.

Failure to have any of the listed mandatory components or features **WILL** result in all relevant penalties being applied.

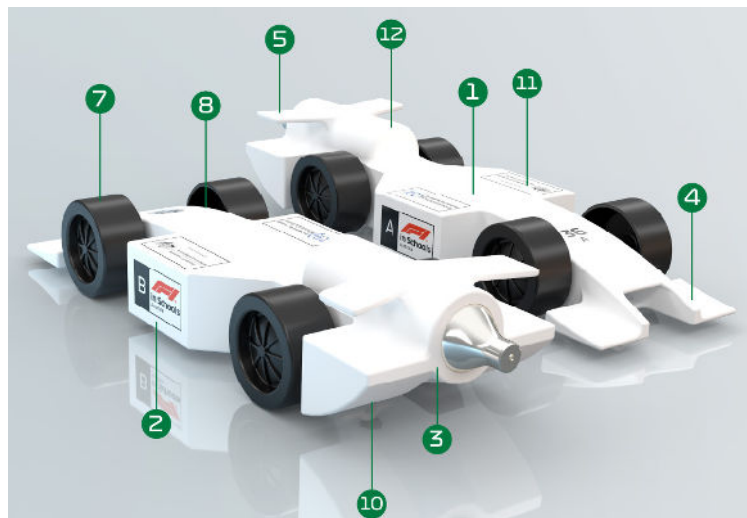

## T1.7 Vertical Reference Plane

To assist with describing dimensions, it is assumed that a two dimensional invisible plane exists along the length of the CO2 cylinder chamber centre axis and perpendicular to the track surface. This is known as the vertical reference plane.

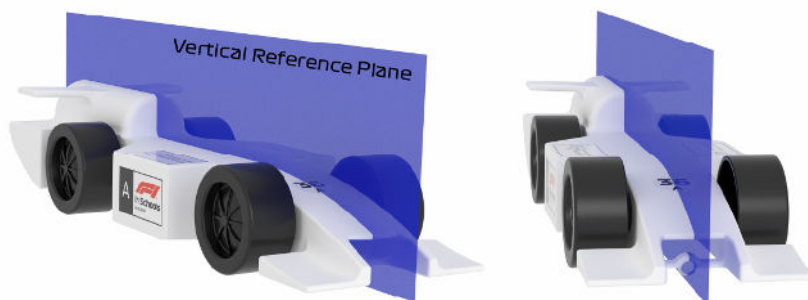

## T1.8 Fully Assembled Car

One F1 in Schools car, without a CO2 cylinder inserted, presented ready for racing, resting on the track surface, free of any external force other than gravity.

## T1.9 Body

The body is defined as the primary connective structure of the car. It is a **solid, uninterrupted** piece of balsa wood which begins at either the front axle centre line or at the boundary of the front wheel support, and extends rearward. For dimensional purposes the body also includes any attached decals and surface finishes. Any balsa wood forward of the front axle centre line is not defined as car body. The body can be thought of as the monocoque car chassis with which all other legal components are integrated.

## T1.10 Side Pod


Defined as a feature of the car body between the front and rear wheels satisfying the side pod dimensional regulations.

## T1.11 CO2 Cylinder Chamber

A circular cylinder of clear space bounded along its side and one end by car body only. This is where the CO2 gas cylinder is placed for racing. Extreme violations of ARTICLE T10 regulations **MAY** lead to cars being deemed ineligible to race due to safety concerns or starting pod incompatibility resulting in zero points for racing.

## T1.12 Wing

A wing on an F1 in Schools car is an aerodynamic feature that permits airflow around **ALL** of its cross sectional boundary. It includes features of a leading and trailing edge. A wing is dimensionally defined by the minimum dimensions of span and chord, and maximum dimensions of thickness.

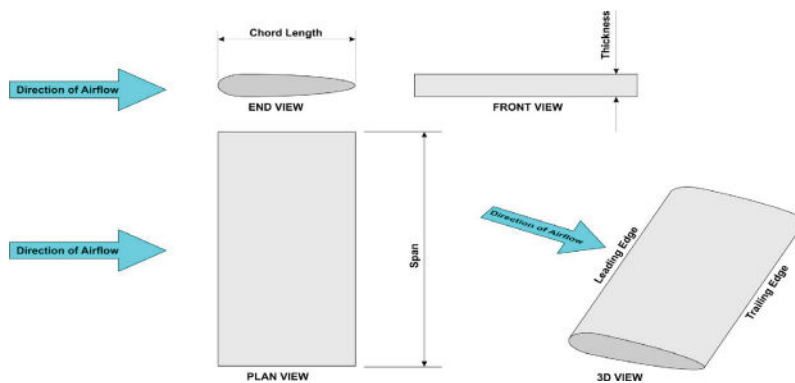

## T1.14 Span

Measurement of a wing span is made parallel to the track surface, on the top or bottom surface of the wing (in the 'y' direction), whichever produces the shortest dimension. Intersecting the wing with other car parts including the body, nosecone or supporting structure reduces the effective span to the sum of the clear airspace envelope segments. An undersized span will lead to deeming the existence of an undersized chord and thickness.

## T1.15 Chord

A wing's chord is measured along the chord line from leading edge to trailing edge. Supporting structures are not included in the measurement. The wing chord minimum dimensions **MUST** be satisfied across the minimum dimensions that define the wing span. An undersized chord **WILL** lead to deeming the existence of an undersized thickness.

## T1.16 Thickness

The thickness of a wing is measured perpendicular to the chord line. Supporting structures are not included in the measurement. The wing thickness min/max dimensions **MUST** be satisfied across the minimum dimensions that define the wing span.

## T1.17 Nosecone

The nosecone is a component of the car, other than wheel, wheel support system, wing or wing support structure, that exists forward of the front axle centre line. This includes any balsa wood or material that continues forward of the front axle centre line, or any other legal materials.



### T1.18 Wheel

A wheel is a single part or assembly of components, cylindrical in form, with its maximum circumference contacting the track surface, enabling motion of the car through its rotation. All material existing within the volume of the extreme diameter and width is considered to be part of the wheel.

### T1.19 Wheel Support System

The wheel support system is defined as the grommets and axles that connect the wheels to the car body.

### T1.22 Tether Line Guide

A tether line guide is a key safety component which completely surrounds the track tether line so as to safely connect the car to the tether line during races. A tether line guide can be a component sourced from a supplier.

### T1.23 Surface Finish & Decals

A surface finish on an F1 in Schools car is considered to be any applied visible surface covering, of uniform thickness over the profile of a car component. A decal is material adhered to a component or surface finish. To be defined as a decal, it must be a maximum 2mm in thickness and 100% of the area of the adhering side must be attached to a surface. Surface finishes and decals are included when measuring the dimensions of any components they feature on. Refer to the Competition Regulations for more information.

Teams **MUST** use the **REA supplied** sidepod and corporate logo car sticker decals. These car sticker decals will be provided at the point of event registration and teams will be given 15 minutes to apply them before submitting Cars A for Specifications Judging.

Teams are **NOT** permitted to create their own F1 in Schools or REA Corporate Partner car sticker decals.

#### T1.23.1 F1® in Schools Logo Car Sticker Decals

This consists of the 'A F1 in Schools decal' for Car A. The F1 in Schools logo graphics are printed with a horizontal dimension of 30mm and vertical dimension of 15mm. Teams will be provided with the white **ONLY** background sticker decal. Official car sticker decals are supplied by REA Foundation Ltd at event registration. Refer to the Competition Regulations for more information.



#### T1.23.2 REA Corporate Partner Car Sticker Decals

This consists of the REA Foundation Ltd logo text and globe graphic, Australian Government Department of Defence logo text and coat of arms graphic, printed with a horizontal dimension of 30mm and vertical dimension of 15mm. Teams will be provided with the white **ONLY** background sticker decal. Official car sticker decals are supplied by REA Foundation Ltd at event registration.



### T1.24 Hand Finishing

Hand finishing is defined as use of a hand powered device (e.g. abrasive paper) for removing only the irregularities that may remain on a CNC machined surface of the car body. These irregularities are often referred to as 'scalloping marks'.

### T1.25 REA Official Balsa Wood Block

The REA official balsa wood block is a homogenous piece of forested balsa wood, processed to the dimensional features as shown by diagrams in the appendix of this document. Note that use of the **F1 in Schools Model Foam Block** is no longer permitted for the Australian National competition but **MUST** be used for the World Final competition.

## T1.26 Engineering Drawings

CAD produced drawings which should be such that, along with relevant CAM programs, could theoretically be used to manufacture the fully assembled car by a third party. Such drawings **SHOULD** include all relevant dimensions, tolerances and material information. F1 in Schools engineering drawings **MUST** include detail to specifically identify and prove compliance for the virtual cargo and wing surfaces.

## T1.27 Launch Energy Recovery System (LERS)

It will not be permitted to attach any device, including a LERS device, to the track or starting mechanism or car, or modify the track or starting mechanism in any way for **ANY** race event within the Australian F1 in Schools competition including Regional Finals. Car alignment devices are permitted provided they are removed from the track and starting mechanism prior to a run.

## T1.28 Ballast Screws

Metal screws are permissible for mass ballast, these are only to be used to ballast the car up to the minimum weight.

# ARTICLE T2 - GENERAL PRINCIPLES

## T2.1 Regulations Documents

REA Foundation Ltd. issues the regulations, their revisions and amendments made.

### T2.1.1 Technical Regulations

This document. The Technical Regulations document is mainly concerned with those regulations that are directly related to F1 in Schools car design and manufacture. Technical Regulation article numbers have a 'T' prefix.

### T2.1.2 Competition Regulations

A document separate to this one which is mainly concerned with regulations and procedures directly related to judging and the competition event. Competition Regulation article numbers have a 'C' prefix.

## T2.2 Interpretation of the Regulations

The final text of these regulations is in English should any dispute arise over their interpretation. The text of a regulation, diagrams and any related definitions should be considered together for the purpose of interpretation.

Text Clarification - Any questions received that are deemed by REA Foundation Ltd. to be related to regulation text needing clarification will be answered by REA Foundation Ltd.

## T2.3 Amendments to the Regulations

Any amendments will be announced and released by REA Foundation Ltd. by email notification to all teachers nominated in the school registration, as well as the updated revision being uploaded to the website at <http://rea.org.au/f1-in-schools/>. Any amended text will be indicated thus (using red underlined text).

## T2.4 Safe Construction

**[Eligibility | 10 Pt Penalty]**

All submitted cars will be inspected closely to ensure that they are engineered and constructed safely for the purpose of racing. High importance is placed on ensuring that tether line guides are robust and secure. If the Judges rule any aspect of a team's race cars to be unsafe for racing, the team will be required to make repairs / modifications. Any such repair work **WILL** result in a penalty being applied. Teams are advised to check both the Technical and Competition Regulations for further advice.

## T2.5 Compliance with Critical Regulations

Points are deducted for non-compliance with the technical regulations. Car A is scrutinised and points will be deducted for any infringements. These penalties are only imposed once, per infringement

### T2.5.1 Penalties for Critical Regulations

Some of the more critical regulations **WILL** attract both a Point Penalty and Time Penalty as per ARTICLE T1.4. The critical regulations are:

Penalty = 4 Pts and 0.05s Time Penalty

**T3.5 / T3.9.1 / T5.1 / T5.2 / T6.1 / T7.14 / T8.1 / T8.2 / T8.5 / T9.3**

Penalty = 4 Pts and 0.02s or 0.05s Tiered Time Penalty

**T3.6 / T5.5 / T7.3.1 / T7.3.2 / T7.8.1 / T7.8.2 / T7.13 / T8.7 / T8.8 / T11.4**

Penalty = 20 Pts and 0.1s Time Penalty

**T7.1.1 / T7.1.2**

### T2.5.2 Tiered Time Penalties

Dimensional critical regulations will be measured and violations less than 1mm will attract a time penalty of 0.02 seconds. Violations of 1mm or more will attract a time penalty of 0.05 seconds.

## T2.6 Rectification of Critical Regulation Infringements

Teams whose race cars have been deemed by Scrutineers to have infringed a regulation attracting a Time Penalty, **MAY** be given an opportunity to rectify this (time permitting) prior to racing with the effect of removing the time penalty. The original point penalty will stand. Teams unable to rectify at this time should refer to the Competition Regulations for more information.

## T2.7 Measurements

### T2.7.1 No Tolerance Unless Stated

No tolerance will be applied for dimensions unless otherwise stated.

### T2.7.2 No Tolerance for Mass

No tolerance will be applied when measuring mass.

### T2.7.3 Dimensional Measures

All car component dimensions are inclusive of any applied paint finish or decal. A series of specially manufactured gauges will be used to broadly verify dimensional compliance. Accurate measuring tools, such as Vernier calipers, will then be used to closely inspect any dimensions found to be close to the dimensional limits per the initial gauge inspection.

### T2.7.4 Scrutineering of Finished Product

Whilst your CAD design **MAY** comply with dimensional regulations, the process of machining, finishing and assembly **WILL** individually impact on the final dimensions of the finished product submitted for scrutineering. It is the actual product that is measured in scrutineering. It is not the design intent that is judged in scrutineering.

### T2.7.5 Mass Measurements

All mass measurements will be made using the REA Foundation Ltd. electronic competition scales which are accurately calibrated to +/- 0.1g.

### T2.7.6 Scrutineering with CO2 Cylinder Inserted

Scrutineering of cars will be conducted with a charged CO2 cylinder inserted into the chamber. The mass of the cylinder will be 29g with a tolerance of +/- 0.5g.

### T2.7.7 Scrutineering Throughout all Configurations

Scrutineering of cars will be conducted by examining cars throughout all possible configurations. Refer to ARTICLE T1.20.

## ARTICLE T3 - GENERAL CAR REGULATIONS

### T3.1 Design, Manufacture & Construction

[Eligibility | 10 Pt Penalty]

#### T3.1.1 CAD & CAM Software Required

All F1 in Schools cars **MUST** be designed and engineered using CAD (Computer Aided Design) and CAM (Computer Aided Manufacture) technology. CAD software used should provide for 3D part modelling, assembly and 3D realistic rendering. The CAM package should allow students to simulate CNC machining processes so they can show evidence of these in their portfolio. We recommend the use of DENFORD QuickCAM PRO software.

#### T3.1.2 CNC Requirement

The body of Cadet Class cars **MUST** be manufactured via material removal using a CNC router/milling machine. We recommend all teams use a DENFORD CNC router. This manufacturing process should occur at your school/college or at a designated manufacturing centre/partner site.

#### T3.1.5 Machining Requirements

Teams **MUST** manufacture their car on a CNC machine using only a side machining process with 1 x mirrored NC code and a 6mm diameter cutter.

#### T3.1.6 Hand Machining

Teams **MAY** machine axle and/or axle grommet holes by an additional hand or CNC process.

#### T3.1.7 No Separately Formed Parts

No balsa wood parts are to be separately formed and glued to the main body.

### T3.2 Leading Features Minimum Width

[Eligibility | 10 Pt Penalty]

The minimum width of any pointed feature of the car assembly **MAY** vary over the first 6mm of its length from its forward most extremity. Teams are advised to check ARTICLE T2.4 for further advice.

#### T3.2.1 Forward Most Extremity

Minimum width at forward most extremity: 3mm or R1.5mm

#### T3.2.2 6mm Back from Forward Most Extremity

Minimum width at 6mm back from forward most extremity: 6mm

### T3.3 Finishing & Assembly

#### T3.3.1 Post Machining Processes

[Advice]

All cars are expected to be finished to a high standard and **MUST** reflect the features of the documented CAD design. Features of the machined car other than machining scallops **SHOULD NOT** be removed.

#### T3.3.3 Hand Finishing

[10 Pt Penalty]

Hand finishing of the car assembly is permitted. Maximum variation to CAD model - including Critical Regulation Rectification processes - is 3mm.

#### T3.3.4 Hand Created Features

[10 Pt Penalty]

No feature of the car body, side pods and wings is to be created solely by a hand process.

## T3.4 Car Decals

### T3.4.1 Team Number Decals

[2 Pt Penalty]

Each team will receive a unique Team Number and a corresponding Team Number Decal, which includes the Team Number followed by an “A”. This decal is required to be affixed to the race car’s body, positioned specifically between the leading edge of the Virtual Cargo and the leading edge of the front tires. The decal **MUST** be clearly visible in the plan view. While teams have the option to create and apply their own Team Number Decals to their vehicles before the event, decals will also be made available at the time of event registration for those who need them.

**Decal Diameter:** 15.0mm

**Decal Font:** Formula 1 Font

**Font Weight for Number:** 18pt

**Font Weight for A:** 9pt



### T3.4.2 REA Foundation Ltd. Corporate Partner Logos

[2 Pt Penalty each]

These sticker decals **MUST** be displayed on all cars at State and National Finals and will be supplied by REA at event check-in. Refer to T1.23 for more information. Each decal infringement attracts a 2pt penalty.

### T3.4.3 Minimum Dimensions & Positioning

[2 Pt Penalty each]


#### T3.4.3.1 Minimum Dimensions

The REA Foundation Ltd., Department of Defence and F1 in Schools sticker decals **MUST** maintain minimum dimensions of 30mm long and 15mm wide. Any trimming of decals will result in a 2pt penalty for each infringement.

#### T3.4.3.2 Positioning of F1® in Schools Sticker Decals

[2 Pt Penalty each]

The ‘A’ F1 in Schools decals are to be applied to the Car’s sidepods. Refer to ARTICLE T1.22.1. Each decal infringement attracts a 2pt penalty. Picture following example only.

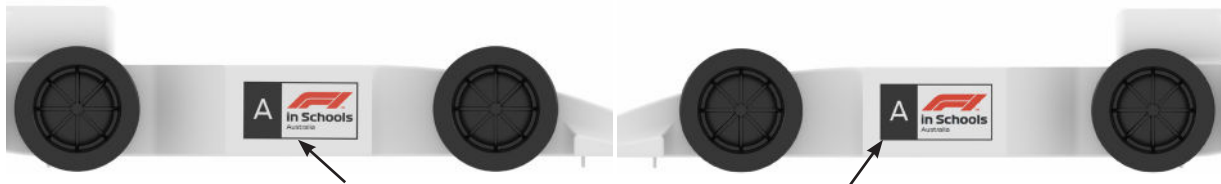

Car A SAMPLE: F1 in Schools Logo Sticker Decal

#### T3.4.3.3 Positioning of Other Corporate Sticker Decals

[2 Pt Penalty each]

All remaining REA supplied corporate sticker decals **MUST** be clearly visible in the top or side view of the car.

### T3.4.4 Regional Sponsors


[Advice]

If your region is supported by a sponsor, corresponding sponsor recognition **MUST** be included in displays, portfolio and on the car.

## T3.5 Undefined Features [0.05 Time Penalty | 4 Pt Penalty]

The car assembly **MUST** only consist of components listed in ARTICLE T1.6.


- T3.6 Overall Length** **[0.02 or 0.05 Time Penalty | 4 Pt Penalty]**
- The overall length of the complete car measured between the front and rear extremes of the car product, including all components with the exception of the CO2 cylinder, **MUST** be a minimum of 170mm and a maximum of 210mm.

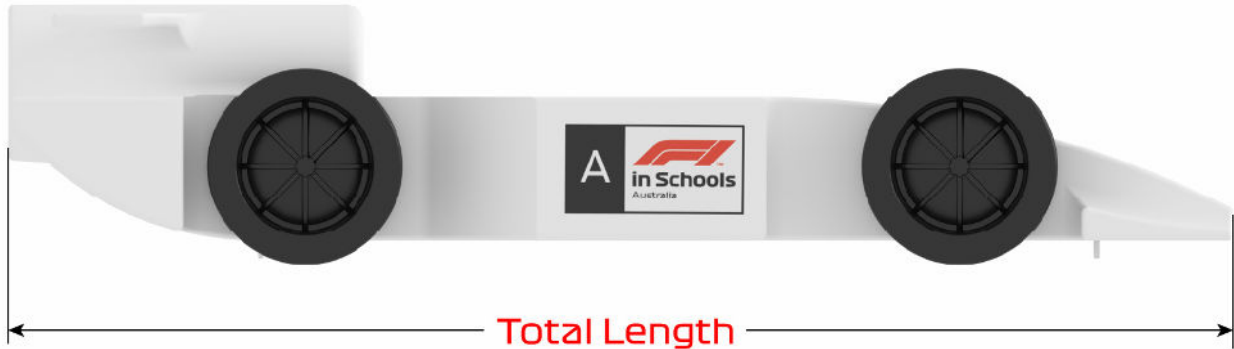

- T3.7 Minimum Mass** **[Eligibility]**
- The minimum mass of the complete car product, without the CO2 cylinder fitted **MUST** be:

**T3.7.2 Cadet Class: 52 grams**

- T3.8 Track Clearance** **[4 Pt Penalty]**
- The track clearance measured normal from the track surface to the lowest point of the car product (excluding the wheel volumes) **MUST** be a minimum of 2mm including the tether line guides. Cars with unsafe arrangements will be ineligible to race if unresolved.

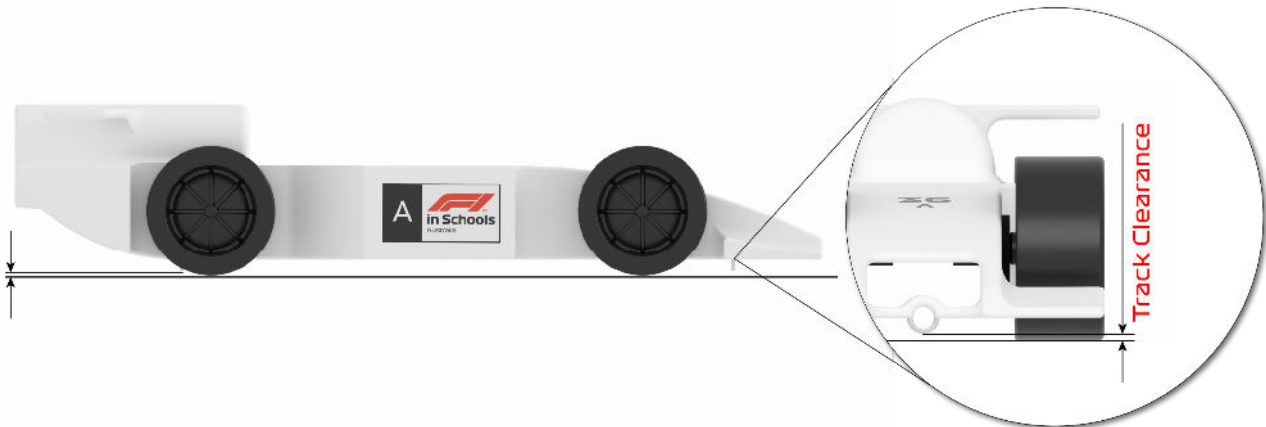

- T3.9 Balsa Wood Components**
- All balsa wood components for a completed car **MUST** be made from an REA supplied single standard balsa wood as defined in these regulations.

- T3.9.1 Default Material** **[0.05 Time Penalty | 4 Pt Penalty]**
- T3.9.1.1 Cadet Class**
- Balsa wood is the default material for all non-rotating components of the car including the body and side pods. Other materials can only be used as explicitly specified.

- T3.9.2 Thickness** **[1 Pt Penalty]**
- Balsa wood components **MUST** be a minimum of 3mm thick.

- T3.10 Status During Racing** **[2 Pt Penalty]**
- The car assembly **MUST** be designed so that no items other than CO2 cylinders are removed, replaced or added to the assembly during scheduled race events.


## ARTICLE T5 - BODY & SIDE POD REGULATIONS

**T5.1 Body Construction** **[0.05 Time Penalty | 4 Pt Penalty]**  
 ⚠ A **single, continuous** piece of CNC manufactured balsa wood, deemed the body, **MUST** exist rear of the front axle centre line. The body begins at either the front axle centre line or at the boundary of the front wheel support and extends rearward. The body, encompasses the side pods, virtual cargo and CO2 cylinder chamber.


**T5.2 Implants, Foreign Objects or Voids** **[0.05 Time Penalty | 4 Pt Penalty]**  
 ⚠ Implants, foreign objects or voids in or on the car body and side pods **MUST NOT** be incorporated.

**T5.3 Width of Side Pod** **[2 Pt Penalty]**  
 The overall width of the side pods measured transversely between the side-pod extremities **MUST** be a minimum of 40mm. Any part having a width less than 40mm is not considered a side pod.

**T5.4 Side Pod Projected Surface** **[2 Pt Penalty]**  
 Each side pod **MUST** present a complete rectangular projected surface when viewed from the side measuring not less than 30mm wide x 15mm high.

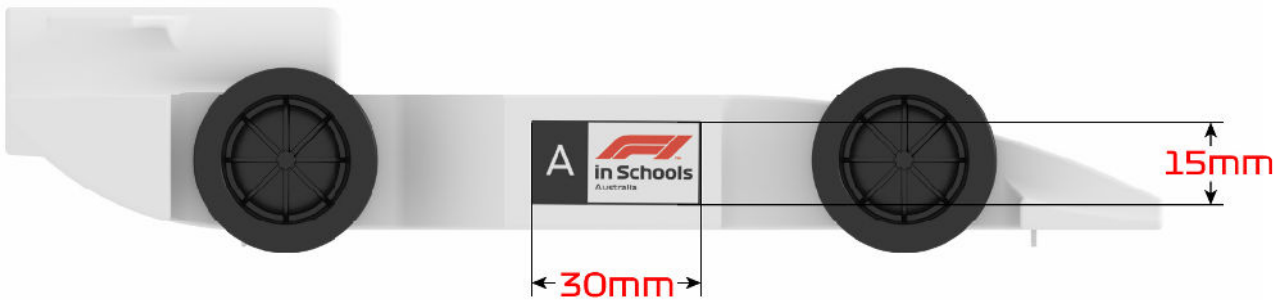


**T5.5 Virtual Cargo** **[0.02 or 0.05 Time Penalty | 4 Pt Penalty]**  
 ⚠ A virtual cargo **MUST** be completely encompassed by the body and be wholly positioned between the front and rear wheel centre lines. The virtual cargo **MUST** have minimum dimensions as shown below, with its top surface split symmetrical by the vertical reference plane of the car body. The virtual cargo **MUST NOT** be intersected by the FRONT wheel support system but **MAY** share common faces with the car body

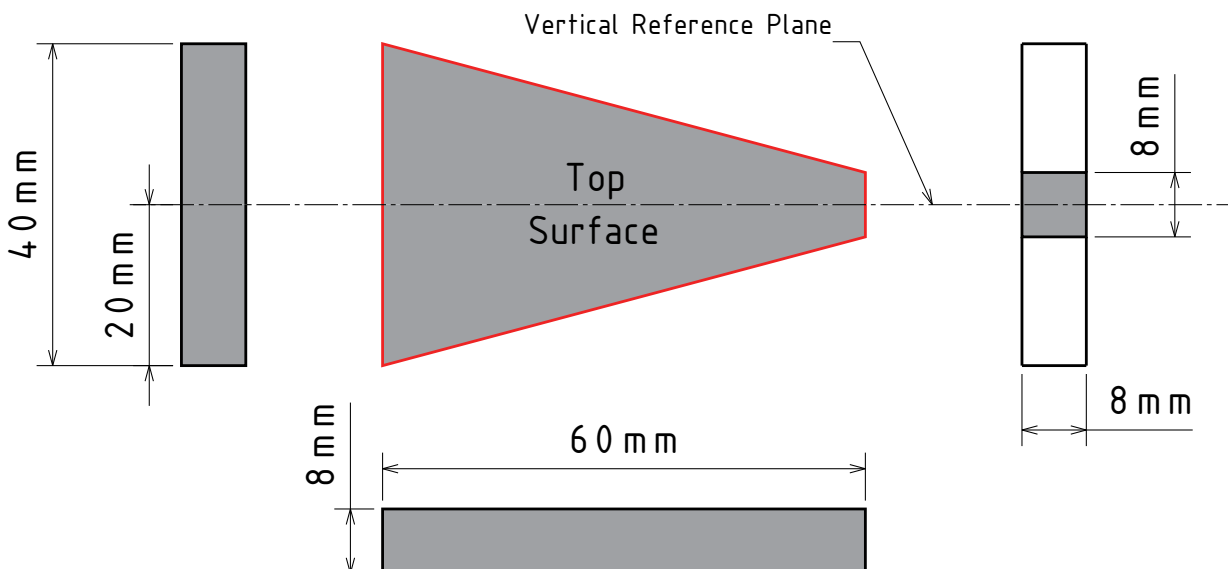

## T5.6 Virtual Cargo Identification

[1 Pt Penalty]

The virtual cargo location and compliance **MUST** be clearly dimensioned and identified by hatching, shading or block colour within the engineering drawings submitted for scrutineering judging. Refer to the example diagram following.

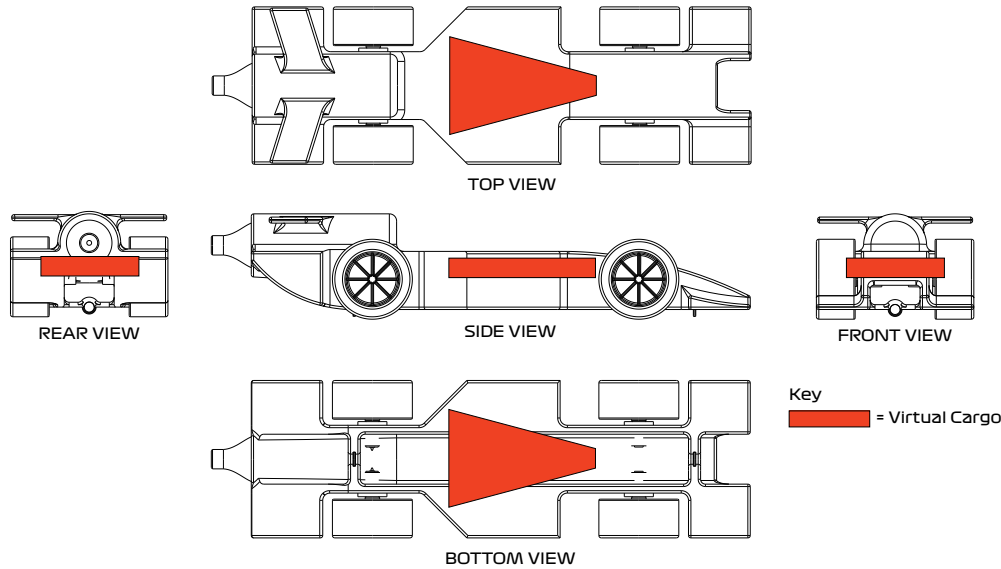

## ARTICLE T7 - WING REGULATIONS

### T7.1 Wings



#### T7.1.1 Car has a Front Wing

[0.10 Time Penalty | 20 Pt Penalty]

Car must have a Front Wing. If the car fails this regulation then skip without penalties all subsequent T7 Front Wing Regulations.



#### T7.1.2 Car has a Rear Wing

[0.10 Time Penalty | 20 Pt Penalty]

Car must have a Rear Wing. If the car fails this regulation then skip without penalties all subsequent T7 Rear Wing Regulations.

### T7.2 Wing Identification

[1 Pt Penalty]

The surfaces defining both the front and rear wings **MUST** be identified clearly within the engineering drawings submitted for scrutineering judging.

### T7.3 Clear Airspace



#### T7.3.1 Front Wing

[0.02 or 0.05 Time Penalty | 4 Pt Penalty]


For a front wing to be deemed to exist, the wing surface **MUST** have a minimum of 3mm of clear 'air' space, to any other part of the car and track surface, measured normal from any part of the front wing's upper, lower, leading edge and trailing edge surfaces. Each individual element of a multi-element wing **MUST** comply with the minimum air space regulation.



#### T7.3.2 Rear Wing

[0.02 or 0.05 Time Penalty | 4 Pt Penalty]

For a rear wing to be deemed to exist, the wing surface **MUST** have a minimum of 3mm of clear 'air' space, to any other part of the car and track surface, measured normal from any part of the rear wing's upper, lower, leading edge and trailing edge surfaces. Each individual element of a multi-element wing **MUST** comply with the minimum air space regulation.

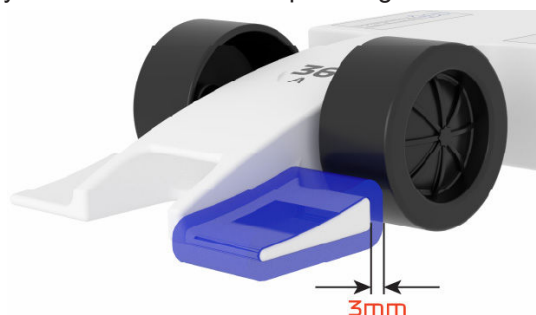




### T7.4 Front Wing Positioning

[1 Pt Penalty]

The whole of the front wing and support structure when viewed from the side **MUST** be in front of the centre line of the front axle.

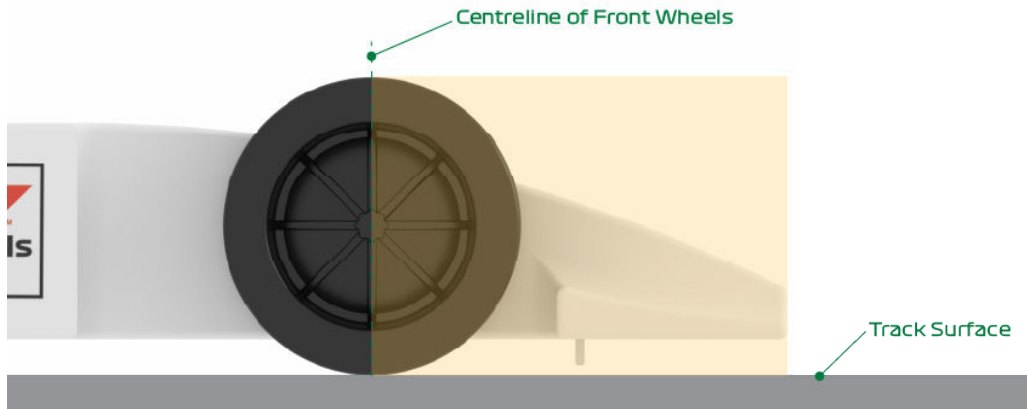

### T7.6 Front Wing Construction Material

[0.05 Time Penalty | 4 Pt Penalty]

Teams **MUST** manufacture the front wing from Balsa.

### T7.8 Span

Where the wing span is intersected by another part of the car, the total span is the sum of each segment. The wing span is measured on the top or bottom surface of the wing, whichever is shortest, parallel to track surface and normal to the vertical reference plane. Refer to T11.7 for a number of examples.



#### T7.8.1 Front wing span

[0.02 or 0.05 Time Penalty | 4 Pt Penalty]

T7.8.1.1 Min: 34mm



#### T7.8.2 Rear wing span

[0.02 or 0.05 Time Penalty | 4 Pt Penalty]

T7.8.2.1 Min: 34mm

### T7.9 Span Segments


[Advice]

The span of a wing can be intersected by the car body, nosecone or wing support structure to form span segments. All span segments **MUST** conform to the wing chord and thickness regulations. If intersected, at least two (2) of the front wing segments and two (2) of the rear wing segments must be no less than the minimum size in span.

Minimum segment span: 10mm

#### Wing and Span Calculations Explained

To be included in the judge's wing span calculation, a wing segment **MUST** be at least 10mm in span. If **ANY** of the segments A, B, C, D were less than 10mm, they would not qualify as wing segments, but would instead be treated as wing support structures.

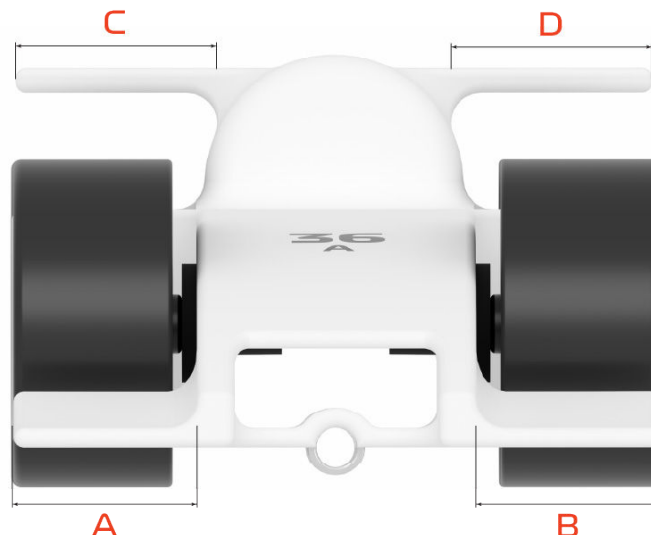

## T7.10 Front & Rear Wing Chord


The wing chord requirements **MUST** be satisfied throughout the wing's minimum span. The chord is the distance between the leading edge and trailing edge measured parallel to the vertical reference plane. Each individual element of a multi-element wing **MUST** satisfy the minimum chord requirement.

**T7.10.1 Front wing chord - Min: 15mm**

**[2 Pt Penalty]**

**T7.10.2 Rear wing chord - Min: 15mm**

**[2 Pt Penalty]**

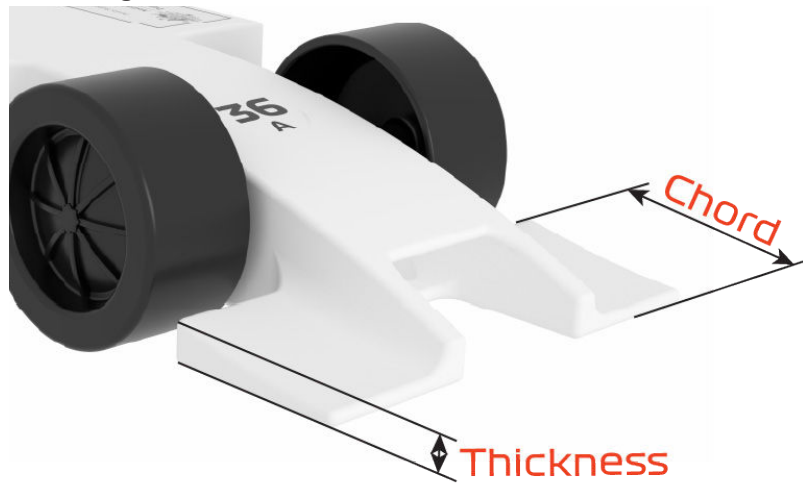

## T7.11 Front & Rear Wing Thickness

The wing thickness requirements **MUST** be satisfied throughout the wing's minimum span, measured perpendicular to the chord line.

**T7.11.1 Front wing thickness**

**[2 Pt Penalty]**

**T7.11.1.1** Min: 3.5mm / Max: 9mm

**T7.11.2 Rear wing thickness**


**[2 Pt Penalty]**

**T7.11.2.1** Min: 3.5mm / Max: 9mm


## T7.12 Rear Wing Positioning

**[1 Pt Penalty]**

The whole of the rear wing when viewed from the side **MUST** be behind the centre line of the rear axle track surface.

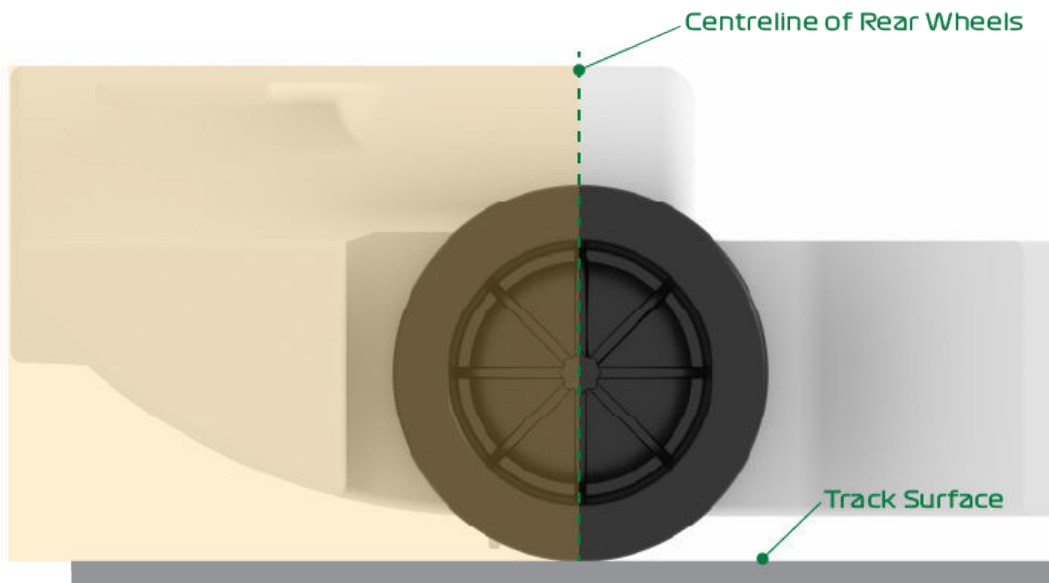

- T7.13 Rear Wing Height** [0.02 or 0.05 Time Penalty | 4 Pt Penalty]
- The bottom surface of the rear wing **MUST** be higher than 34mm when measured from and normal to the track surface.

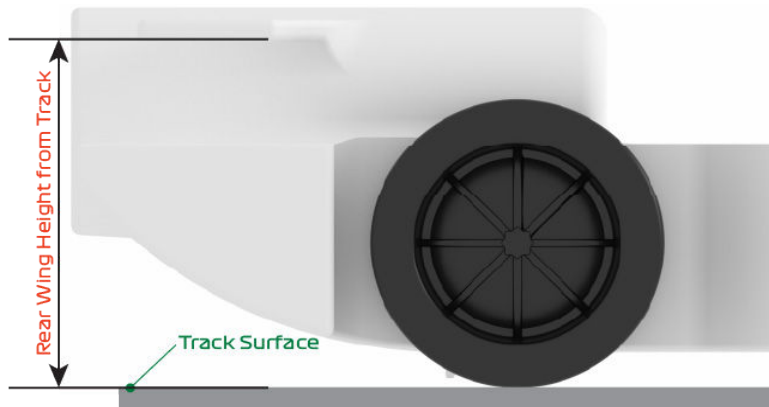

- T7.14 Rear Wing Construction Material** [0.05 Time Penalty | 4 Pt Penalty]
- Teams **MUST** manufacture the rear wing and any supporting structure from balsa wood.

## ARTICLE T8 - WHEEL REGULATIONS


- T8.1 Number and location** [0.05 Time Penalty | 4 Pt Penalty]
- The car assembly **MUST** include 4 cylindrical wheels, two at the front and two at the rear. The two front wheels **MUST** share a common centerline. The two back wheels **MUST** share a common centerline.

- T8.2 REA Standard Wheels** [0.05 Time Penalty | 4 Pt Penalty]
- Teams **MUST** use any combination of four (4) unmodified REA standard wheels. No other parts can be added to the wheels. Removal of the sprue remnant is acceptable.

- T8.5 Full Contact Width** [2 Pt Penalty]
- With a CO2 cylinder loaded, all 4 wheels **MUST** touch the racing surface at the same time across the full contact width of the wheel (zero tolerance). That is, there **MUST** be no "camber". (Tested using the thickness of a strip of 80gsm paper on a flat surface.)

- T8.7 Freely Rotating Wheels** [0.05 Time Penalty | 4 Pt Penalty]
- The track contact surface of all four wheels **MUST** rotate freely about their own centre axis to facilitate motion of the car during racing. A car must be able to roll unassisted from a standing start down a straight ramp surface angled at 10 degrees from the horizontal for a minimum distance of 500 mm. Sliding or skidding motion of any wheel is not permitted and **ALL** wheels must freely rotate for the full distance.

- T8.8 Visibility in Front View** [0.02 or 0.05 Time Penalty | 4 Pt Penalty]
- Visibility of the front wheels in the car's front view **MUST** only be obstructed to a height of 15mm from the track surface.

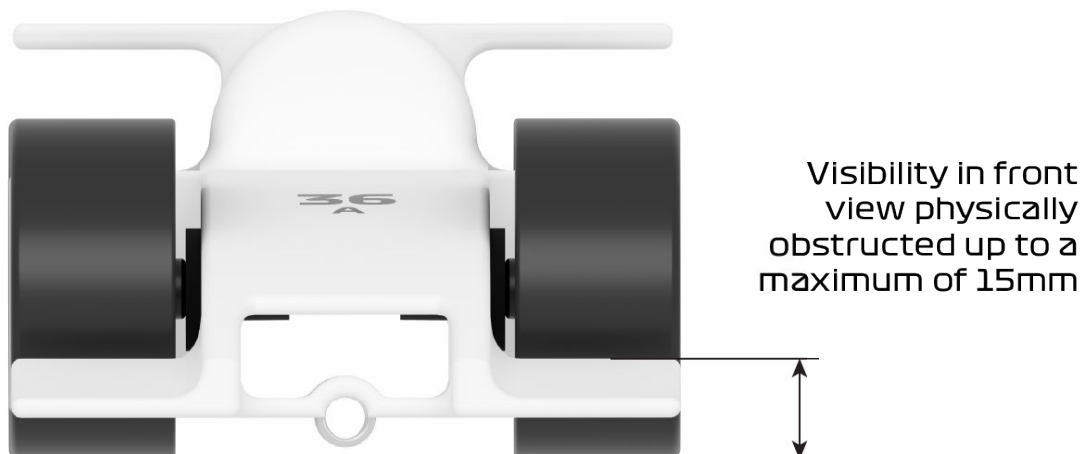

**T8.9 Visibility from Top, Bottom & Side** **[0.02 or 0.05 Time Penalty | 4 Pt Penalty]**

The visibility of all wheels must not be physically obscured by any component of the car in the car's top and bottom elevation views. Car body or any other components must not exist within the dimensions illustrated below. These dimensions must exist from the inside edges of each wheels' track contact width to the extreme width of the car assembly and a height from track surface of 65.0mm. This is measured, parallel to the vertical reference plane and track surface.

**T8.9.1 In front of front wheels**

Min: 1.0mm

**T8.9.2 Behind front wheels**


Min: 15.0mm

**T8.9.3 In front of rear wheels**

Minimum dimensions on diagram below

**T8.9.4 Behind rear wheels**

Min: 1.0mm

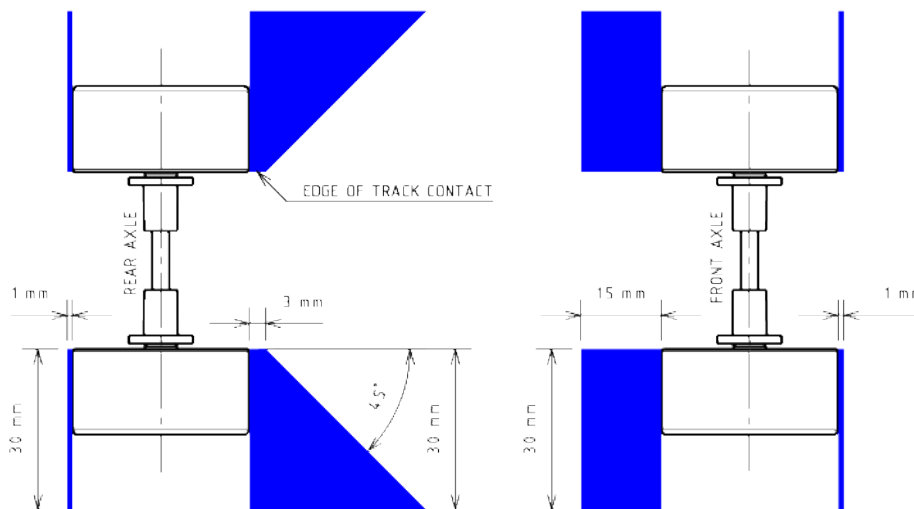


## ARTICLE T9 - WHEEL SUPPORT REGULATIONS

- T9.3 REA Standard Grommets** [0.05 Time Penalty | 4 Pt Penalty]  
 Teams **MUST** use four (4) unmodified REA axle grommets.
- T9.4 REA Standard Axles** [2 Pt Penalty]  
 Teams **MUST** use REA standard brass axles (3.175mm) **OR** axles from a different material with a minimum 3mm diameter.
- T9.5 Modifications** [2 Pt Penalty]  
 Teams **MUST NOT** use any other parts or make any other modifications to the wheel support system.


## ARTICLE T10 - TETHER LINE GUIDE REGULATIONS

- T10.1 Location** [Eligibility | 10 Pt Penalty]  
 Each car **MUST** have 2 (essentially circular) tether line guides firmly secured toward the front and rear of the car, located on the underside along the car body centre line. The track tether line passes through these two tether line guides. An adhesive **MAY** be used to help secure the tether line guides.

- T10.2 Separation** [1 Pt Penalty]  
 The longitudinal separation of the tether line guides as measured between the inside edges of the guides **MUST** be a minimum of 120mm.

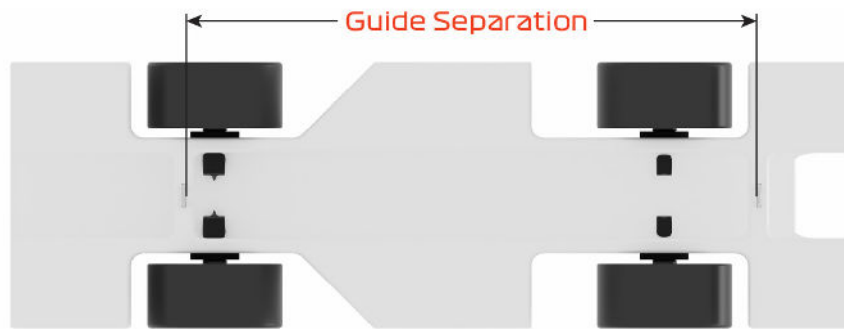

- T10.3 Inside Diameter** [2 Pt Penalty]  
 The inside diameter of the tether line guide (referring to the size of the hole) **MUST** be a minimum of 3mm

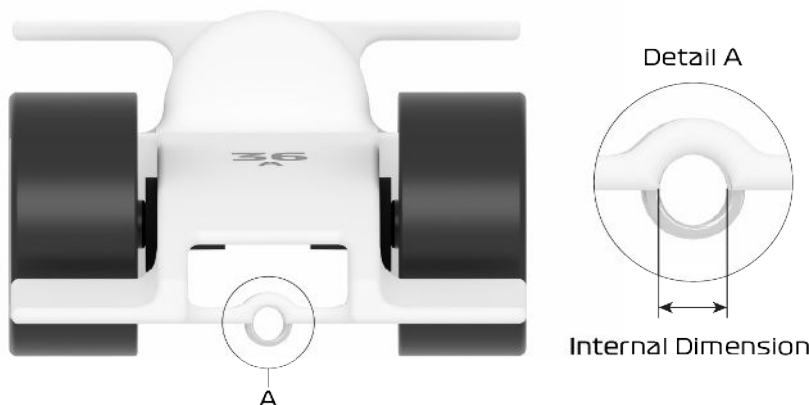

- T10.4 Safety**
- T10.4.1 Closed Guides** [Eligibility | 4 Pt Penalty]  
 The tether line guides **MUST** be closed to prevent the tether line from coming out of the tether line guide. This is considered a safety issue. Cars **WILL** be ineligible to race if unresolved.
- T10.4.2 Sharp Edges** [Eligibility | 4 Pt Penalty]  
 Tether guide arrangements with sharp edges **WILL** be prevented from racing.

### T10.4.3 Strength & Fixing

[Eligibility | 4 Pt Penalty]

Adequate strength and fixing of the tether line guides **MUST** be considered a safety issue and cars with unsafe arrangements will be ineligible to race if unresolved. The guides must be robust so as to prevent the diameter or shape changing during racing. A tether line guide test will be conducted during scrutineering using a 200g mass (2.0N max) to check the guides are securely fitted to the car and safe to race.



## ARTICLE T11 - POWER PLANT PROVISIONS

### T11.1 Interfacing with Launch Pod

[Eligibility | 20 Pt Penalty]

The cylinders provide the car propulsion and when fully inserted, all cars **MUST** interface directly with the standard track starting pod mechanism without the use of additional launch equipment.

### T11.2 Diameter

[1 Pt Penalty]

The CO2 cylinder chamber diameter **MUST** be 19mm (+/- 0.5mm)

### T11.3 Depth

[1 Pt Penalty]

Depth of chamber measured parallel to the vertical reference plane anywhere around the chamber circumference from opening to chamber end **MUST** be a minimum 45mm and maximum 60mm.

### T11.4 Distance from Track Surface

[0.02 or 0.05 Time Penalty | 4 Pt Penalty]


The vertical height of the lowest point of the CO2 cylinder chamber above the race track surface **MUST** be a minimum of 22mm for the Cadet Class.

### T11.5 Chamber Wall Thickness

[Eligibility | 4 Pt Penalty]

The CO2 cylinder chamber **MUST** be completely surrounded by a minimum 3mm thickness of material. The chamber surrounds and connection to the car body will be assessed and if determined below the minimum thickness, may be considered a safety issue at the judge's discretion. Minimum thickness is measured through any line of the chamber radius. **IMPORTANT:** The entire circumference and length of the cylinder chamber must not be punctured by any object.

Min: 3mm

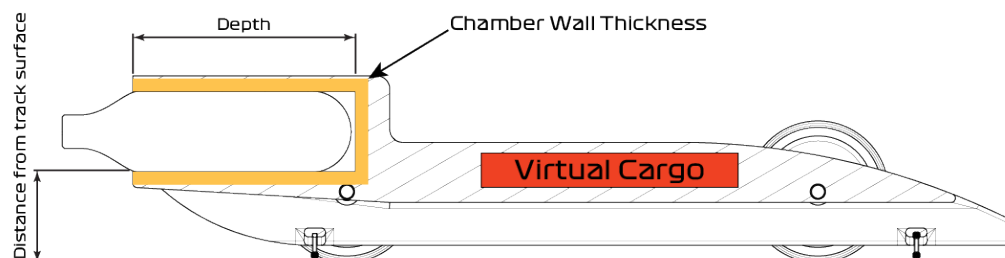

### T11.6 Finishing of Chamber Surrounds


[1 Pt Penalty]

Paint and other foreign materials **MUST NOT** be present inside the CO2 cylinder chamber. This is considered a measure of manufacturing quality control.

## ARTICLE T12 - APPENDICES

### T12.1 Official REA Balsa Block Dimensions

Below: Orthographic projection of REA Standard Balsa Wood Block. All dimensions shown in millimetres. Not drawn to scale.

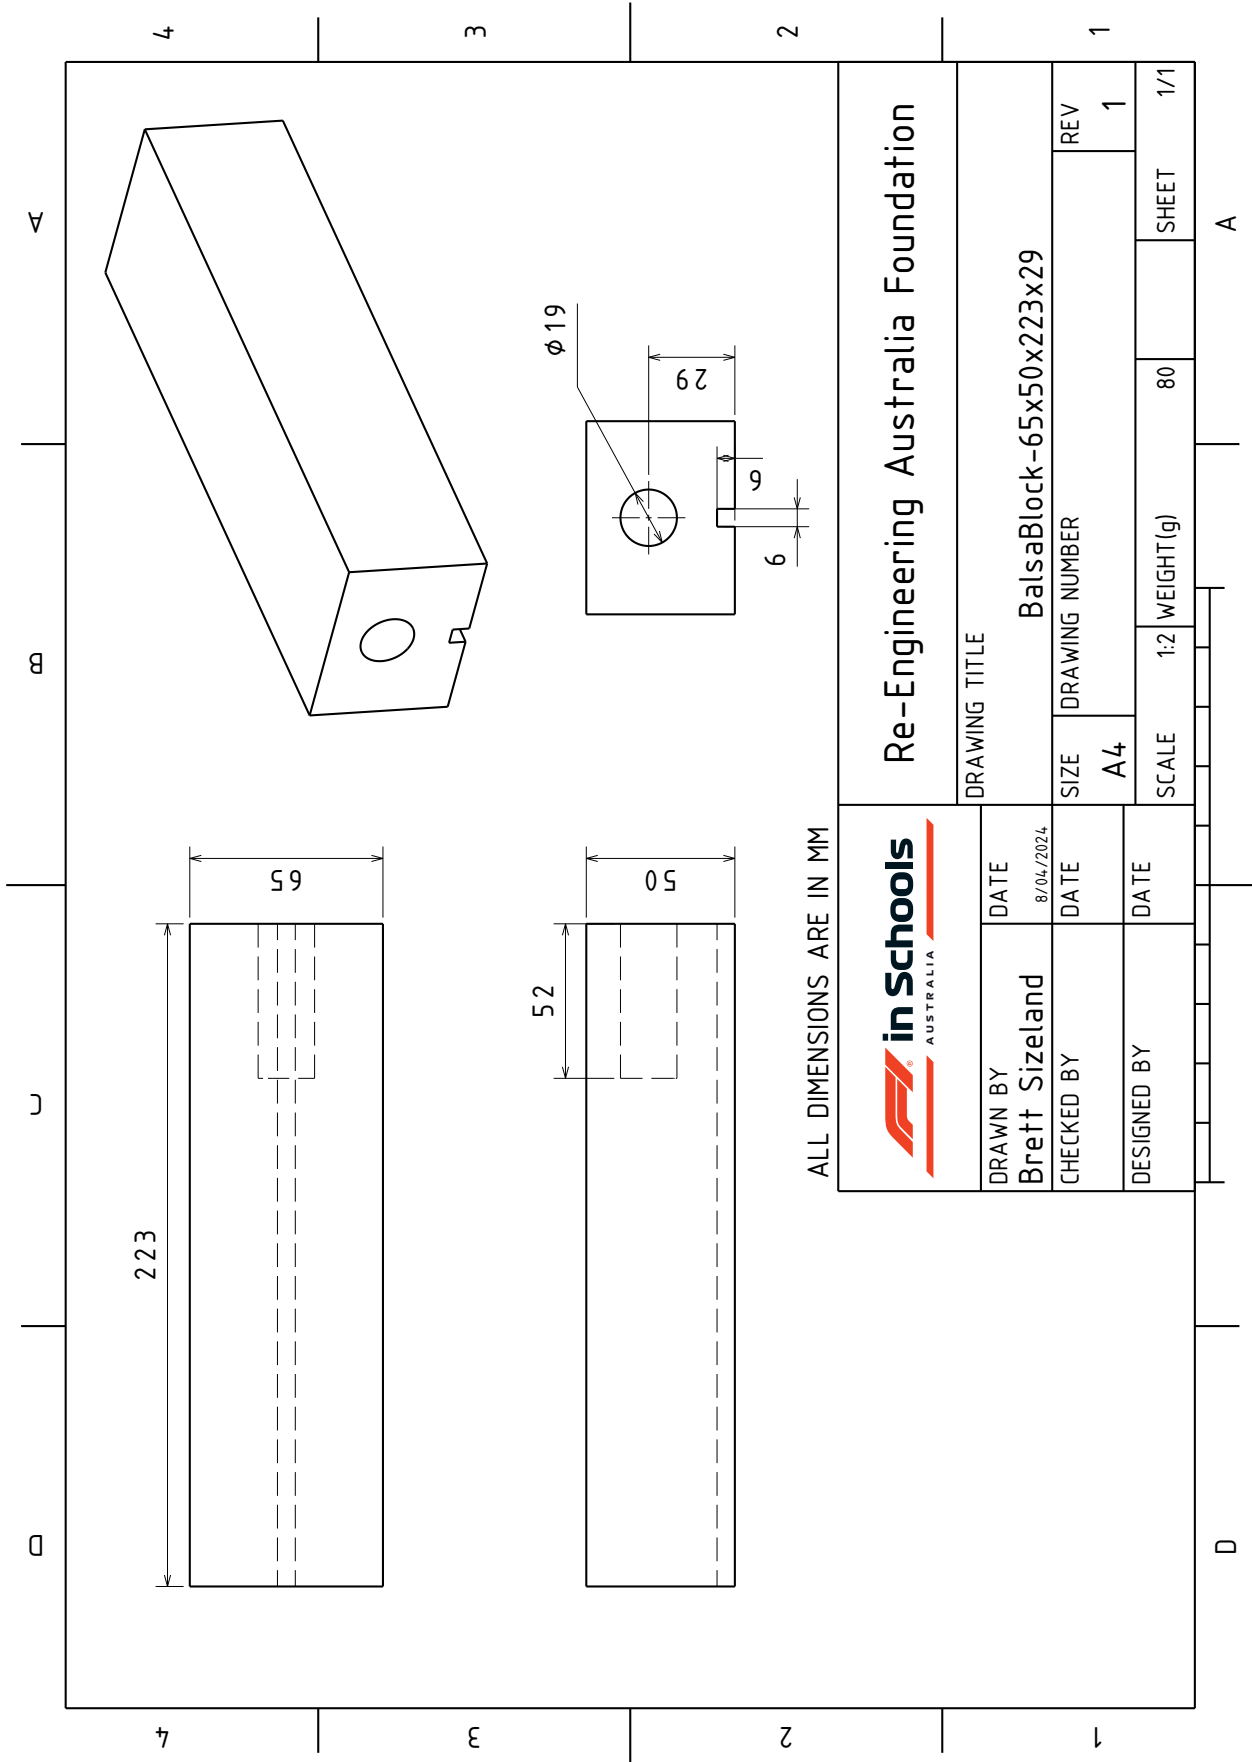


ALL DIMENSIONS ARE IN MM

		<b>Re-Engineering Australia Foundation</b>	
		DRAWING TITLE	
DRAWN BY <b>Brett Sizeland</b>	DATE 8/04/2024	BalsaBlock-65x50x223x29	
CHECKED BY	DATE	SIZE A4	DRAWING NUMBER
DESIGNED BY	DATE	SCALE 1:2	REV 1
		WEIGHT(g) 80	SHEET 1/1






### T12.2 REA Standard Tether Guide Insertion Instructions

Can be used in balsa wood blocks.

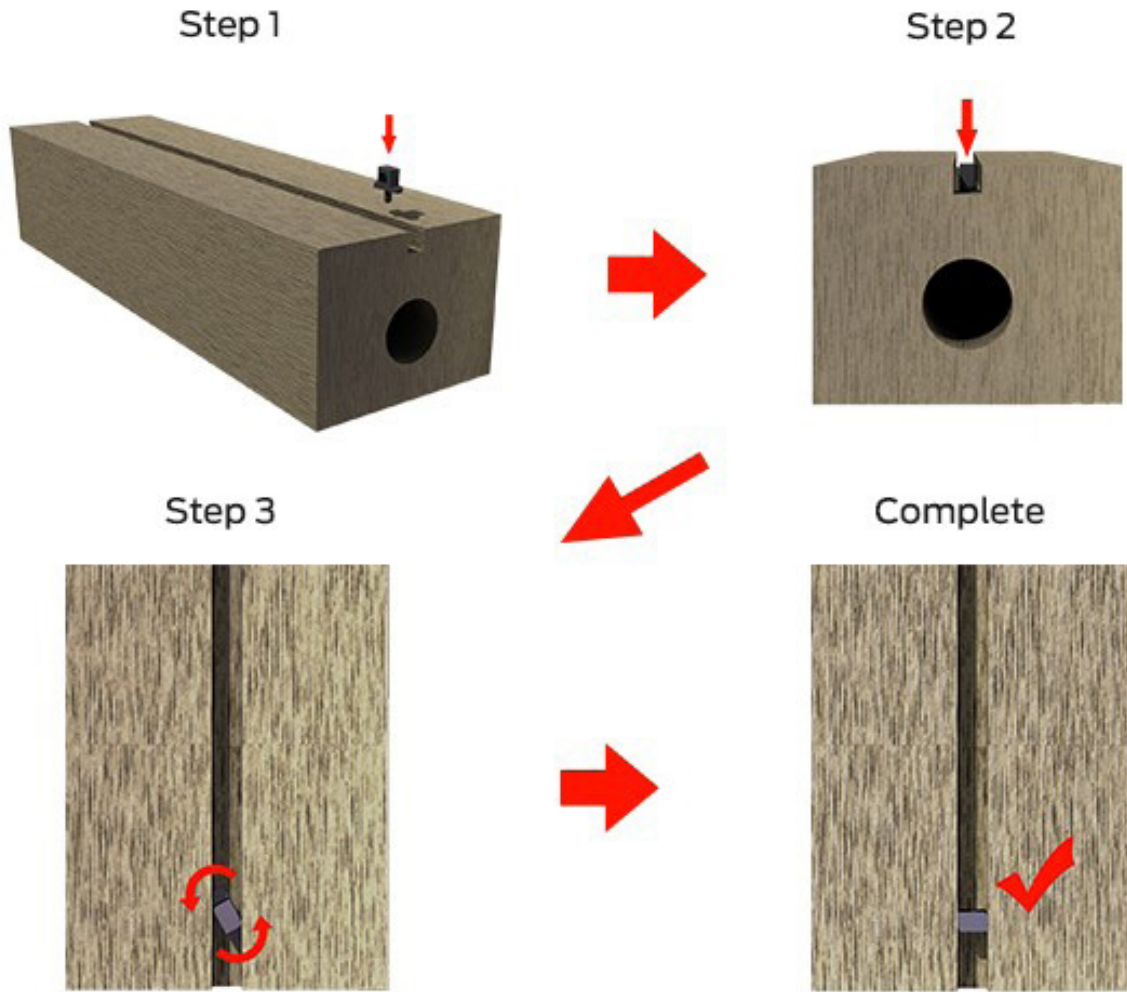




### T12.3 Official REA Standard Wheel Kit

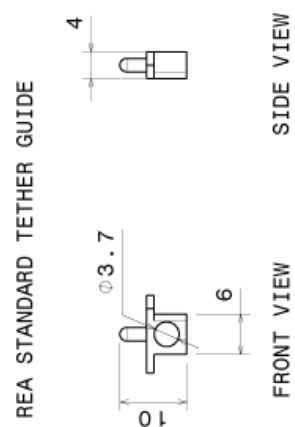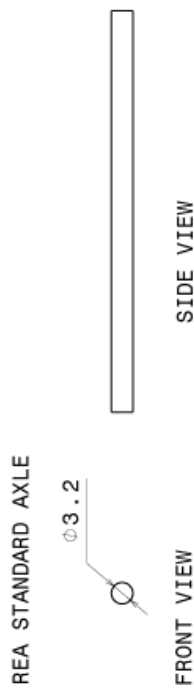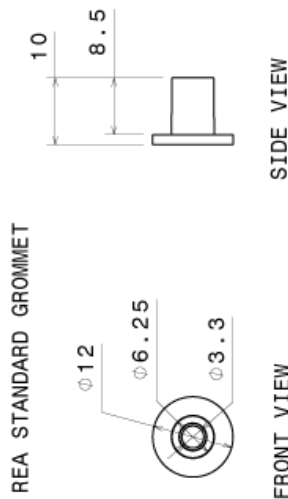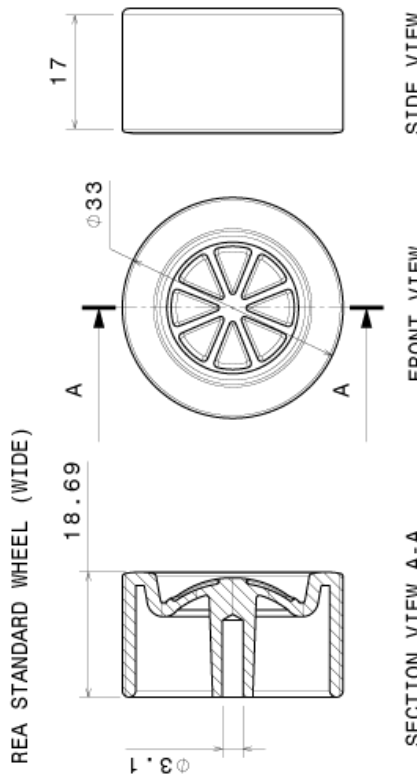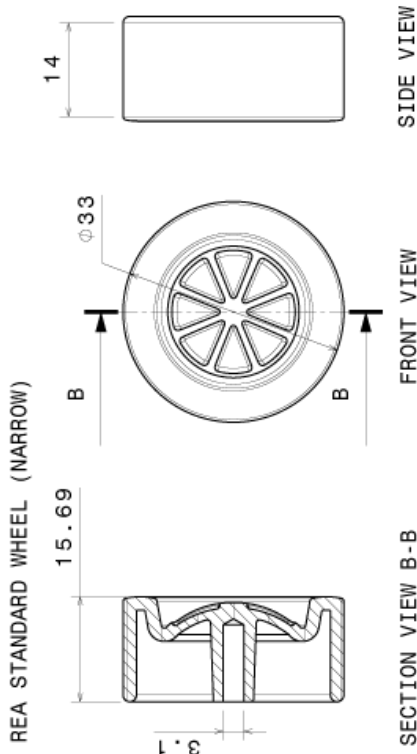


ALL MEASUREMENTS ARE IN (MM) UNLESS OTHERWISE STATED

DESIGNED BY: B. SIZELAND	<b>REA STANDARD WHEEL KIT</b>		Re-Engineering Australia Foundation	DRAWING NUMBER REA - WK	SHEET 1/1
DATE: 20/05/2015					
CHECKED BY: W. SMITH					
DATE: 20/05/2015					
SIZE: A4					
SCALE: NB 0.00	RECORD (TAG)				
THIS DRAWING IS OUR PROPERTY. IT CAN'T BE REPRODUCED OR COMMUNICATED WITHOUT OUR WRITTEN AGREEMENT.					


### T12.4 Example Orthogonal Drawing

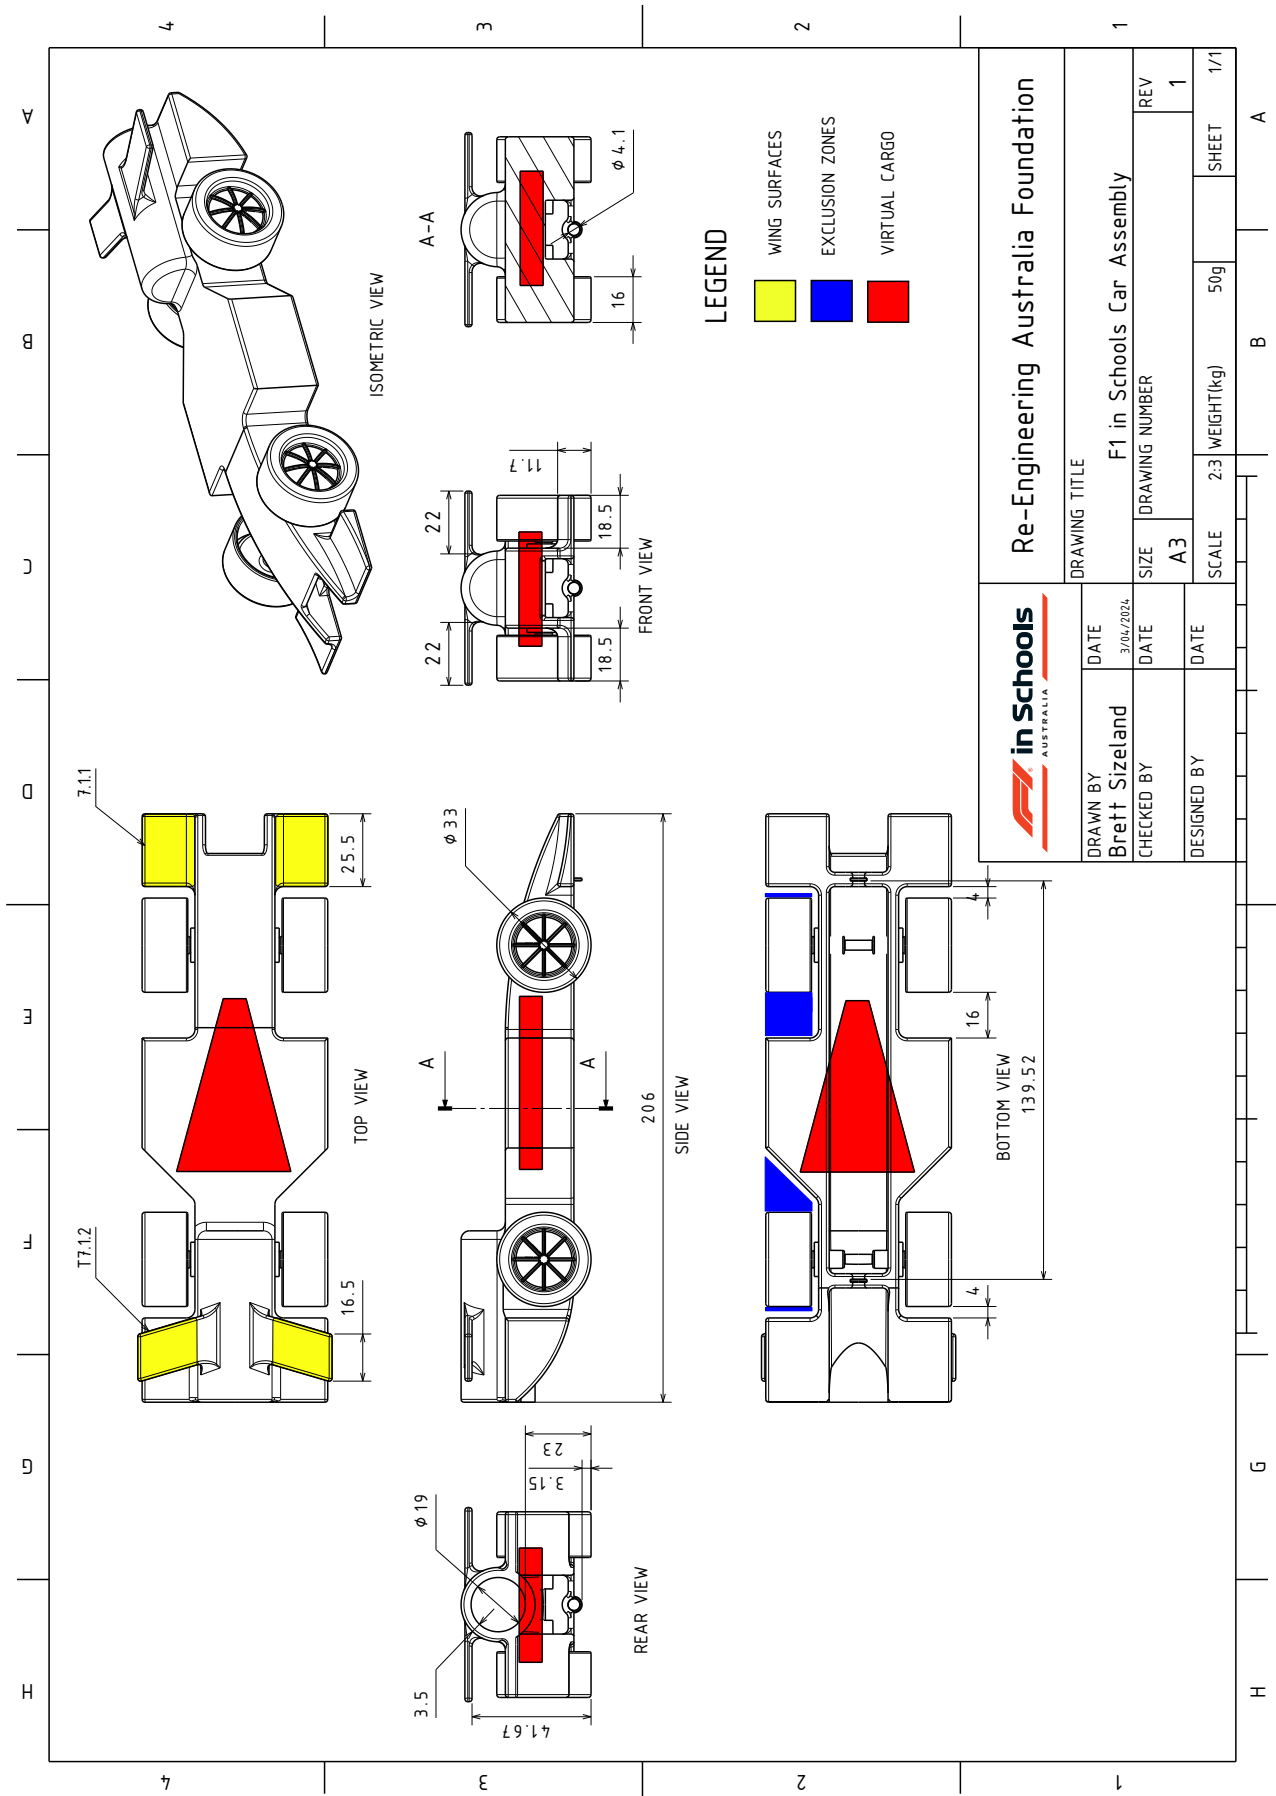


### T12.5 Wing Span Diagram




SPAN: 20+18=38  
 PASS: Balsa  
 FAIL: Alternative



SPAN: 31+0=31  
 FAIL: Balsa  
 FAIL: Alternative




SPAN: 17+0+17=34  
 PASS: Balsa  
 FAIL: Alternative




SPAN: 10+22+0=32  
 FAIL: Balsa  
 FAIL: Alternative

**SCRUTINEERING PRINCIPLES:**


- THE SPAN OF A SEGMENT MUST BE AT LEAST 10 mm TO BE INCLUDED IN WING SPAN CALCULATION (RULES T6.8)
- CHORD (T6.9), THICKNESS (T6.10) AND CLEAR AIRSPACE RULES (T6.2) APPLY OVER EACH VALID WING SEGMENT




SPAN: 22+18=40  
 PASS: Balsa  
 PASS: Alternative



SPAN: 20+13=33  
 FAIL: Balsa  
 FAIL: Alternative




SPAN: 15+11+15=41  
 PASS: Balsa  
 PASS: Alternative




SPAN: 11+10+11+0=32  
 FAIL: Balsa  
 FAIL: Alternative


**WING SEGMENTS**

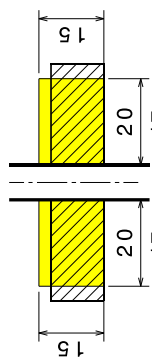


PASS: Span  
 FAIL: Chord+Thickness



PASS: Span  
 FAIL: Chord+Thickness




PASS




PASS: Span  
 FAIL: Chord+Thickness

**SCRUTINEERING PRINCIPLES:**


- ACTUAL WING PROFILE (CROSS-HATCHED) MUST TOTALLY ENCLOSE THE MINIMUM SPAN AND CHORD AREA (YELLOW) (RULES T6.7 AND T6.9)
- THICKNESS RULE (T6.10) AND CLEAR AIRSPACE RULE (T6.2) APPLY OVER ENTIRE ACTUAL WING PROFILE (CROSS-HATCHED)




PASS



FAIL: Span+Chord+Thickness




PASS



PASS: Span  
 FAIL: Chord+Thickness



ACTUAL WING PROFILE



MINIMUM SPAN & CHORD

**2-PIECE SYMMETRICAL WING**



RE-ENGINEERING AUSTRALIA FOUNDATION

**ENGAGE  
INSPIRE  
EDUCATE  
STUDENTS  
TEACHERS  
INDUSTRY**

[www.rea.org.au](http://www.rea.org.au)